


SWING ST1494

SWING



| Device Specifications | |
|------------------------------------|----------------------|
| Safety zone | 40,30 m ² |
| Length | 1,94 m |
| Width | 6,15 m |
| Total height | 2,32 m |
| Free fall height | 1,30 m |
| Age group | 1-3/3-14 years |
| In accordance w/ EN standards | 1176-1:2017 |
| Weight of the heaviest part [kg] | 28 |
| Dimension of the biggest part [cm] | 300x8x8 cm |
| Availability of spare parts | Yes |

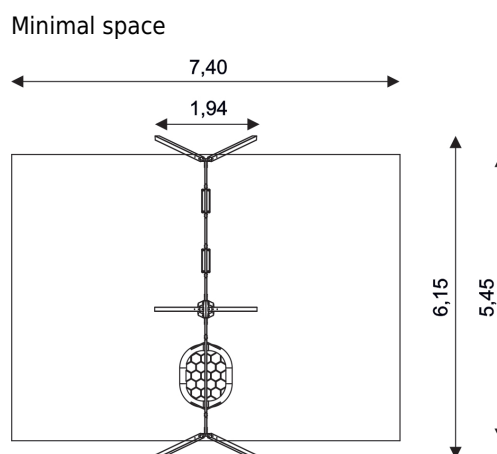

Material specification:

- Galvanized and/or powder coated steel 80 x 80 mm construction;
- Top of the construction is secured with rubber caps;
- Stainless steel screws or screws covered with plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- Stainless steel chain hooks;
- Calibrated chain preventing fingers from getting stuck;
- Durable certified seat with back support and safety bars for the youngest children;

Additional information:

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface: 80/70/60 cm;
- The equipment is designed for public playgrounds;
- Available with different seat options: R1 - flat seat, R2 - cradle seat, R3 - belt seat, R5 - flat with back rest;

Surfaces:

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: sand with minimal layer thickness of 30 cm (A,C), synthetic material approved for free fall of 1,30 m (A,B,C)

